



CÔNG TY TNHH TM-SX-DV ĐÔNG HẢI


544/23 Lý Thường Kiệt, P7, Q.TB
Tel: 9713956 – 9008843 Fax: 9712069

KHỚP NỐI MỀM CAO SU, NỐI REN HIỆU “ARMFLEX” - TAIWAN
“ARMFLEX” RUBBER FLEXIBLE JOINTS THREAD END
MAX WORKING PRESSURE: 10KG/CM²

Size
DN20 (3/4")
DN25 (1")
DN32 (1.1/4")
DN40 (1.1/2")
DN50 (2")



SYMBOL	PART	ENGINEERING MATERIAL
1	UNION	FB32
2	REINFORCING CLOTH	NYLON FABRIC
3	ELASTOMER	SYNTHETIC RUBBER

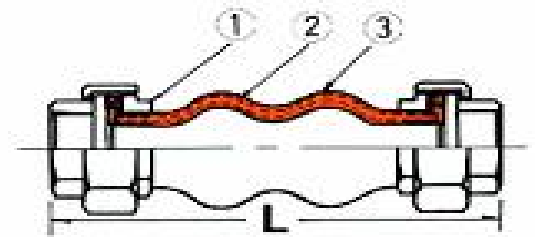


STANDARD ITEM EMPLOYS BS UNION. MAY BE REPLACED WITH ANSI, DIN, AND OTHER STANDARD.

1. Axial Compression

2. Axial Elongation


3. Transverse Movement

4. Angular Deflection

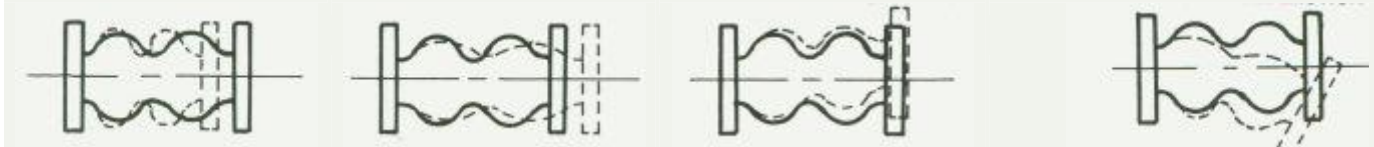

Dimension (mm)

Item	L	Allowable Movements			
		Axial		Transverse Movement	Angular Deflection
		Compression	Elongation		
15(1/2")	202mm	22mm	6mm	22mm	30°
20(3/4")	203	22	6	22	30°
25(1")	203	22	6	22	25°
32(1-1/4")	203	22	6	22	25°
40(1-1/2")	203	22	6	22	20°

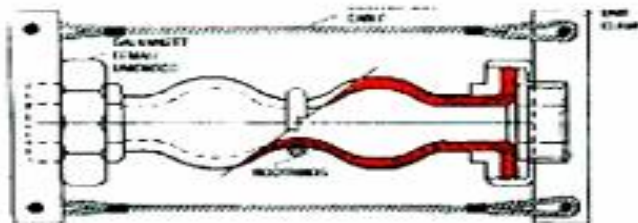

Operating Conditions

- Operating Pressure 10 kg/cm²
- Burst Pressure 50 kg/cm²
- Vacuum Rating 400 mm/Hg
- Temperature - 20°C ~ 100°C

