


RMA/ROM TYPE RUBBER MOUNT

(Deflection:5.0~8.0mm)

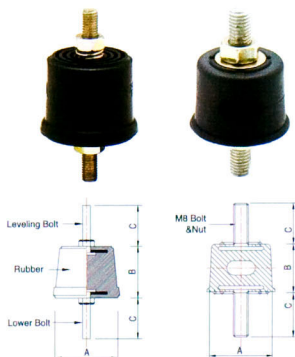

► RMA Type Features

- Cylindrical rubber mount with reinforcing plates on top and bottom of the interior side.
- CR(Neoprene) linage synthetic rubber with excellent oil-resistant and ozone- resistant properties.

► Usage

- Small pumps, fans & small machine

► ROM Type Rubber Oval Mount Features


- This rubber mount is developed for increasing deflection and maintaining equipment to be stable operating against horizontal vibration. The Hardness is 55+5 and M8 bolt is applied of mount. The maximum capacity is up to 25kgf.

DIMENSION & SELECTION GUIDE BY LOADS

TYPE	Capacity (kgf)	Hardness (Hs)	Spring Constant (kgf/mm)	Deflection (mm)	Weight (kg)	Dimension(mm)			
						A	B	C	Leveling Bolt
RMA - 70	70	60 ± 5	14	5.0	0.6	50	46	22	M10
RMA - 100	100	60 ± 5	18	5.5	0.8	60	50	29	M10
RMA - 180	180	60 ± 5	33	5.5	1.0	70	50	33	M12
RMA - 300	300	60 ± 5	55	5.5	1.4	80	50	33	M12
RMA - 500	500	60 ± 5	72	7.0	1.5	105	56	38	M16
RMA - 800	800	60 ± 5	100	8.0	1.6	125	62	42	M16
RMA - 1200	1,200	60 ± 5	150	8.0	1.8	150	65	42	M20
ROM - 25	20	60 ± 5	4	5.0	0.06	33	27	20	M20

NRM TYPE RUBBER MOUNT

(Deflection:15mm)

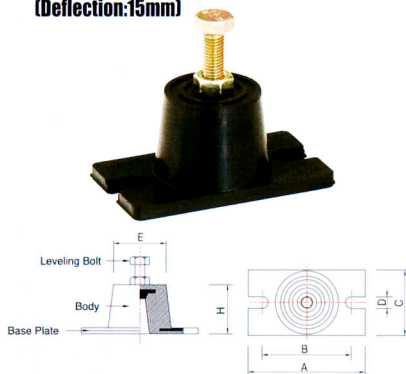

► Features

- CR(Neoprene) linage synthetic rubber with excellent oil-resistant and ozone-resistant properties.
- Guide holes for anchoring on the base plate of the bottom make it easy to install.

► Usage


- Small pumps, fans
- Package air conditioner
- Other small machine on the solid floor. - Air Cleaners

DIMENSION & SELECTION GUIDE BY LOADS

TYPE	Capacity (kgf)	Hardness (Hs)	Spring Constant (kgf/mm)	Deflection (mm)	Weight (kg)	Dimension(mm)					
						A	B	C	D	E	Leveling Bolt
NRM - 300	300	60 ± 5	20	15	0.26	100	76	56	10	45	M10
NRM - 500	500	60 ± 5	34	15	0.7	139	105	83	14	64	M12
NRM - 1000	1000	60 ± 5	67	15	0.9	158	126	99	14	83	M12

GRM TYPE RUBBER MOUNT

(Deflection:2.5~5.0mm)



► Features

- Resistant against oil, heat, ozone and chemicals, these products are made of highly elastic neoprene rubber.

► Usage

- Vibration-proofing for gymnasiums, studios, stages, anechoic rooms and APT floors

DIMENSION & SELECTION GUIDE BY LOADS

TYPE	Capacity (kgf)	Hardness (Hs)	Spring Constant (kgf/mm)	Deflection (mm)	Weight (kg)	Dimension(mm)			
						A	B	C	D
GRM - 250	125~250	55 ± 5	50	2.5~5.0	1.6	177	50	94	23
GRM - 350	175~350	55 ± 5	70	2.5~5.0	1.8	145	51	62	37