


UM-1 Direct Mount Series





Weight : 1.6 kg

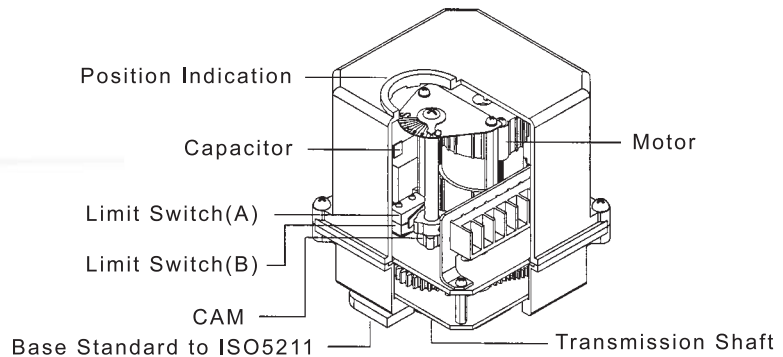

Specification				Speed(sec)		Output Torque Kgf-cm		
Power	110VAC	220VAC	24VDC	AC	DC	110VAC	220VAC	24VDC
10W	0.4A	0.25A	0.5A	10	15	350	362	438
15W	0.8A	0.5A	N/A	10	N/A	410	432	N/A

The Size Of Valve		
Screwed Ends	Flanged Ends	3-Way Valve
1/4" ~ 1 1/2"	1/2" ~ 1"	1/2" ~ 1"

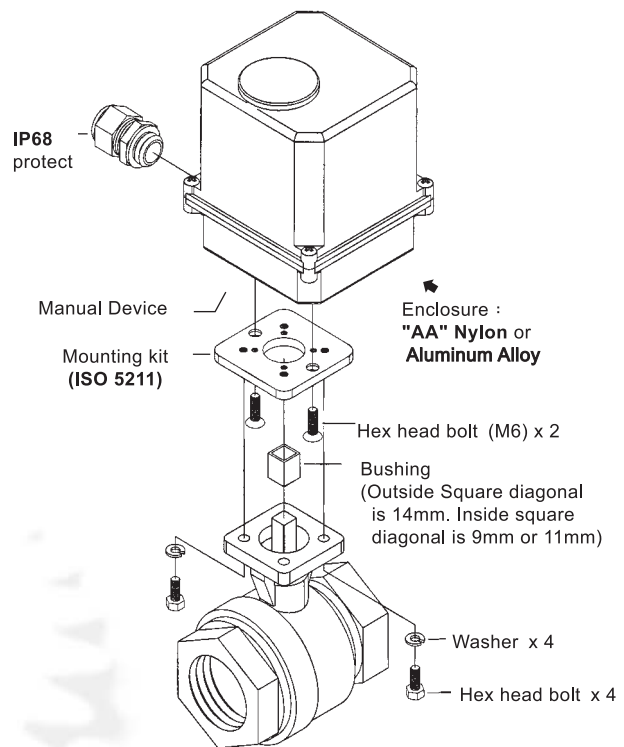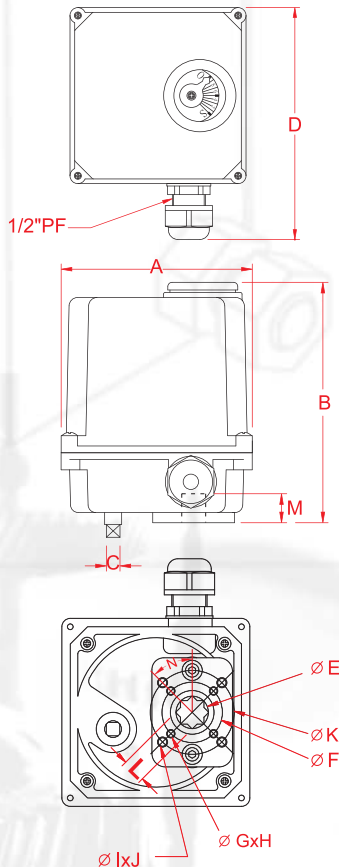

Mounting Pattern :

mounting pattern	bore distance (P.C.D)	Hex head bolt size
A	ø 36 (P.C.D)	M5 x P0.8 x 12L
	ø 50 (P.C.D)	M6 x P1.0 x 15L
B	ø 50 (P.C.D)	M5 x P0.8 x 12L
	ø 70 (P.C.D)	M8 x P1.2 x 15L

Dimension (mm)	A	B	C	D	E	F	G	H	I	J	K	L	M	N	ISO 5211
Model															
UM-1	112	144	8	148	19	36	M5	4	M6	4	50	14	18.5	45	F03 / F05