


UM-4 Direct Mount Series




Weight : 8.5 kg


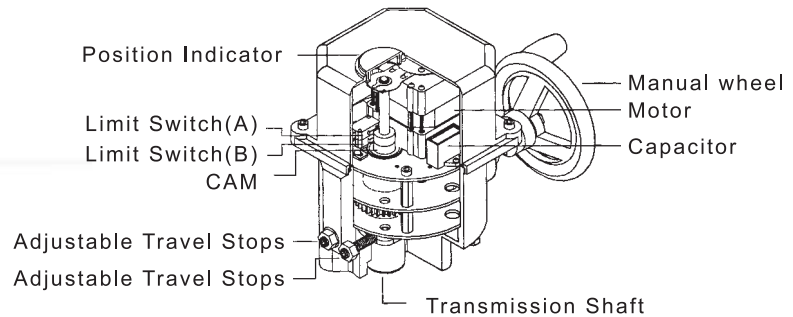


Speification				Speed(sec)		Output Troque Kgf-cm			
Power	110VAC	220VAC	24VDC	AC	DC	110VAC	220VAC	24VDC	
25W	0.76A	0.42A	N/A	20	N/A	2500	2500	N/A	
				30		3118	3320		
30W	N/A		0.5A	N/A	20	N/A		2630	
					30			3400	

The Size Of Valve				
Time	Screwed Ends	Flanged Ends	Butterfly Valve	3-Way Valve
20 sec	2 1/2" ~ 3"	2 1/2" ~ 3"	4" ~ 5"	2 1/2"
30 sec	3" ~ 4"	3" ~ 4"	5" ~ 8"	2 1/2" ~ 3"

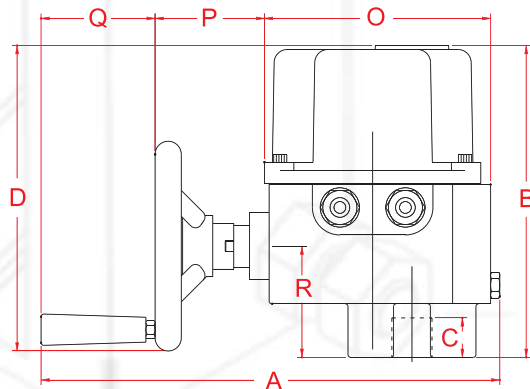

*The UM-4/24VDC is over standard height 26mm.

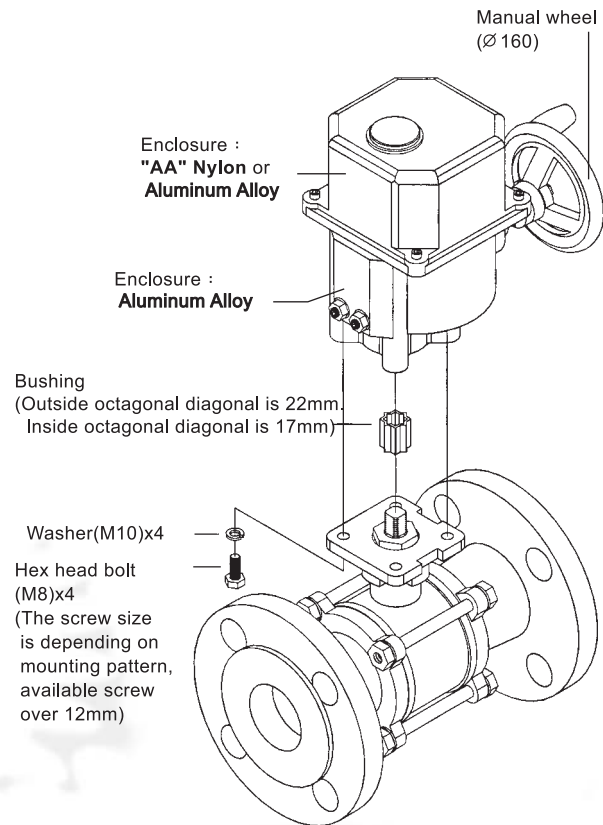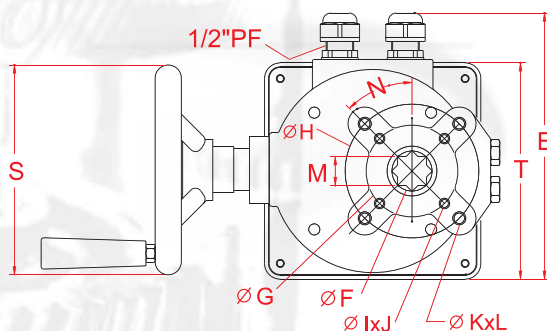

Dimension (mm)	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	ISO 5211
Model																					
UM-4	350	240	30	235	203	30.6	70	102	M8	4	M10	4	22	45	173	84	87	85	160	165	F07/F10