


UM-6 Direct Mount Series




Weight : 9.2 kg


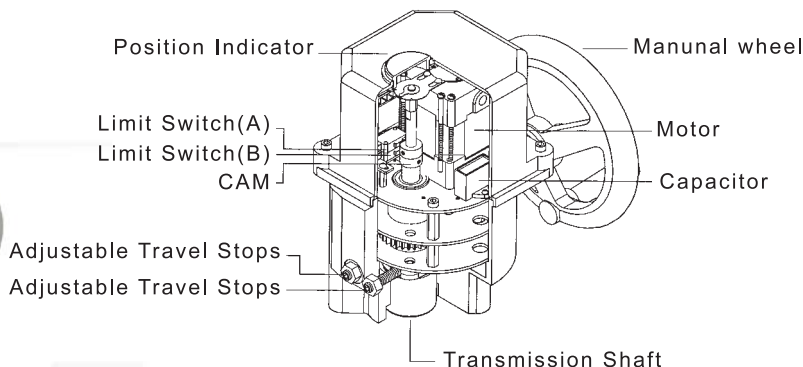


Specification				Speed(sec)		Output Troque Kgf-cm		
Power	110VAC	220VAC	24VAC	AC	DC	110VAC	220VAC	24VDC
60W	1.2A	0.66A	N/A	30	N/A	5689	6081	N/A
65W	N/A		1.5A	N/A	30	N/A		6232

The Size Of Valve		
Flanged Ends	Butterfly Valve	3-Way Valve
5" ~ 6"	10" ~ 12"	4" ~ 5"

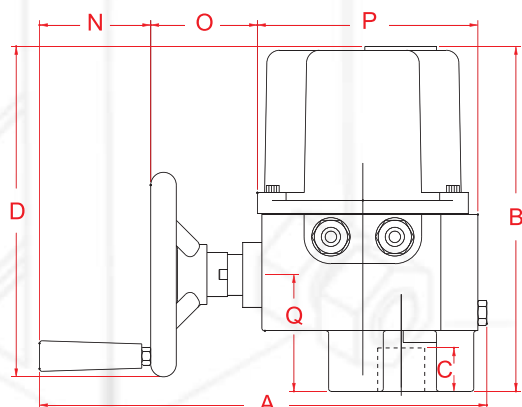

*The UM-6/24VDC is over standard height 33mm.

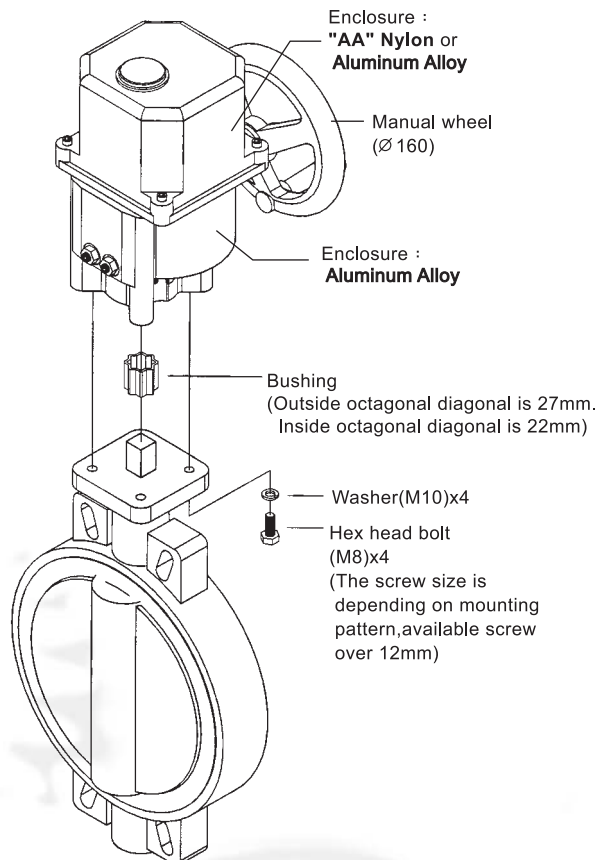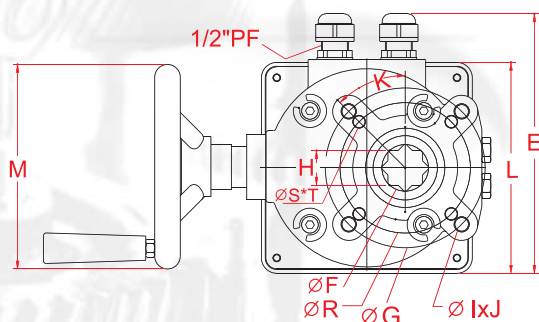

Dimension (mm)	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	ISO 5211
Model																					
UM-6	350	272	34	260	203	36.6	125	27	M12	4	45	165	200	87	84	173	92	102	M10	4	F10/F12