

VOCI DI CAPITOLATO - TECHNICAL FEATURES




Corpo in ottone nichelato.
Temperatura minima e massima d'esercizio: -20°C, 200°C.
Pressione nominale: 10 bar.
Attacchi filettati ISO 228
(equivalente a DIN EN ISO 228 e BS EN ISO 228).

Body in nickel-plated brass.
Minimum and maximum working temperatures: -20°C, 200°C.
Nominal pressure: 10 bar.
Threads: ISO 228
(equivalent to DIN EN ISO 228 and BS EN ISO 228).


MISURA/SIZE	3/8"
PRESSIONE/PRESSURE	10bar/145psi
CODICE/CODE	3620038S
IMBALLO/PACKING	10/120

QUOTE DI INGOMBRO - DRAWING

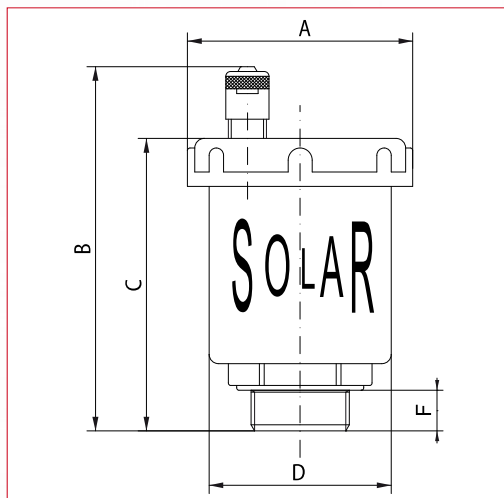

MISURE / SIZE	3/8"
DN	10
A (mm)	50
B (mm)	80
C (mm)	64
D (mm)	40
F (mm)	8,5
PRESS. ATMOSF. / WORK. PRESS. Kg/cm ² - bar	10
PRESS. ATMOSF. PSI LBS WORK. PRESS	145

SCHEDA MATERIALI - MATERIALS

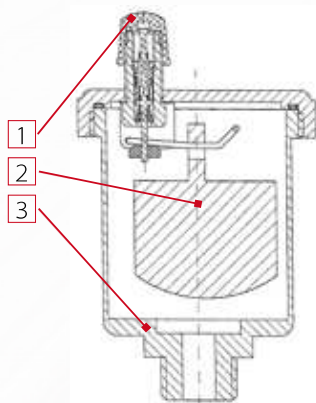

POS.	DESCRIZIONE/DESCRIPTION	Q.TÀ/N.	MATERIALE/MATERIAL
1	Tappo / Plug	1	Ottone / Brass CW617N
2	Galleggiante / Floating	1	MOPLN
3	Corpo / Body	1	Ottone / Brass CW617N