


SRA – SPRING RUBBER MOUNT

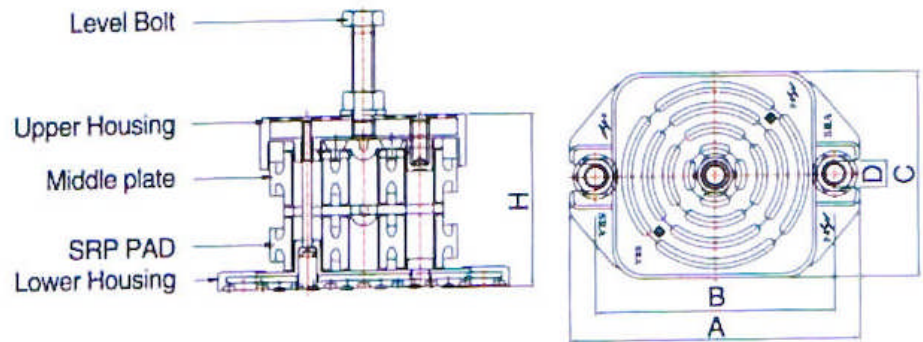

Features

SRA mount is up-graded the efficiency of vibration absorption by modify of SRM mount. Leveling is easy by using SRP spring rubber pad and the efficiency of vibration absorption is much higher by using double pads.

Usage

- Various equipment installed on strong base (Pump, Fan, AHU), industrial machine, Horizontal & Riser pipe.

DIMENSION & SELECTION GUIDE BY LOADS

TYPE	Capacity (kg)	Deflection (mm)	Weight (kg)	Dimension (mm)					
				A	B	C	D	H	Level Bolt
SRA -100	100	6.0	1.2	114	89	84	13	47	M 10x60
SRA -200	200		1.3						
SRA -400	400		1.9	155	128	110	14	50	M 12x65
SRA -600	600		2.0						
SRA -800	800		2.1						
SRA2 -100	100	12.0	1.3	114	89	84	13	81	M 10x60
SRA2 -200	200		1.4						
SRA2 -400	400		2.3	155	128	110	14	85	M 12x65
SRA2 -600	600		2.4						
SRA2 -800	800		2.5						