




L3 密閉式
Sealing 1/2"~2"



L3P 密閉式
Sealing 1/2"~2"

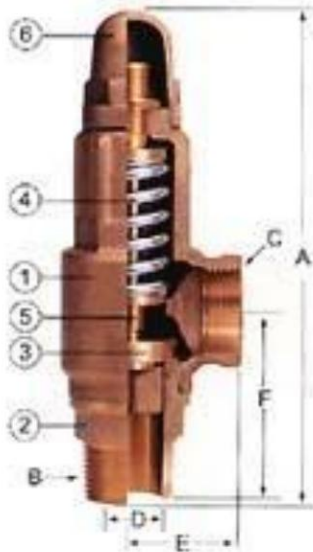

L3-L 手拉式
Lever 1/2"~2"



● 尺寸表 Dimensions

(密閉式 Sealing)

單位 Unit:mm

(手拉式 Lever)

單位 Unit:mm

尺寸 Size	密閉式 Sealing						手拉式 Lever				
	項目 Item	入口 Inlet	出口 Outlet	閥座徑 Valve seat orifice		揚程 Lift	重量 Wt. kg	項目 Item	重量 Wt. kg		
	A	B	C	D	E	F		A1			
1/2"	139	1/2"	1/2"	13	29	51	0.52	0.53	1/2"	162	0.60
3/4"	150	3/4"	3/4"	19	36	56	0.76	0.68	3/4"	174	0.76
1"	182	1"	1"	25	40	71	1.00	1.10	1"	202	1.25
1-1/4"	208	1-1/4"	1-1/4"	32	51	83	1.28	1.87	1-1/4"	222	1.86
1-1/2"	233	1-1/2"	1-1/2"	38	55	94	1.52	2.28	1-1/2"	247	2.31
2"	266	2"	2"	50	67	103	2.00	3.91	2"	287	4.13

● 材質表 General Material

序號 NO.	零件 Parts Name	型式 Type	L3 密閉式 Sealing	L3-L 手拉式 Lever
1	閥體 Valve body		Cast bronze 青(銅)銅	Cast bronze 青(銅)銅
2	閥座 Valve seat		Forging brass(鍛造黃銅)	Forging brass(鍛造黃銅)
3	閥盤 Disc		Forging brass(鍛造黃銅)	Forging brass(鍛造黃銅)
4	彈簧 Spring		Steel(鋼)	Steel(鋼)
5	閥桿 Stem		Brass(黃銅)	Brass(黃銅)
6	閥蓋 Cap		Forging brass(鍛造黃銅)	Cast bronze 青(銅)銅
使用壓力 Working pressure			0.3~10 kgf/cm ²	
使用溫度 Working temp			-45℃~185℃	
使用液體 Working fluid			非腐蝕性氣體、非腐蝕性液體、空氣、蒸氣 Noncorrosive Gas、Noncorrosive Liquid、Air、Steam	非腐蝕性氣體、空氣、蒸氣 Noncorrosive Gas、Air、Steam

- ◆ 閥盤可加裝PTFE材質，型式：L3P、L3-LP。
- ◆ 閥座材質亦可以跟金銅製造。
- ◆ 閥盤可加裝EPDM材質，型式：L3E、L3-LE。

- ◆ The disc can be replaced with PTFE and those type L3P、L3-LP。
- ◆ The valve seat can be also made of cast bronze。
- ◆ The disc can be replaced with EPDM and those type L3E、L3-LE。