
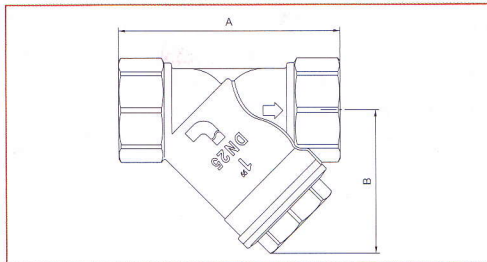


192

Y strainer



Suitable for domestic water services, heating and air-conditioning plants, compressed air systems.

Female/female threads and inspection plug.
Body in brass.

Minimum and maximum working temperatures:
-20°C, 110°C in absence of steam.



Degree of filtration: 1/4" through 2" 500µm, 2.1/2", 3", 4" 800µm.

Threads: ISO228 (equivalent to DIN EN ISO 228 and BS EN ISO 228).

SIZE	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
A (mm)	55	55	58	70	87	96	106	126	150	169	219
B (mm)	40	40	40	48	56	64	73	89	107	120	161
DN	8	10	15	20	25	32	40	50	65	80	100
WORKING PRESSURE Kg/cm2 bar	20	20	20	20	20	20	20	20	16	16	16
WORKING PRESSURE psi	290	290	290	290	290	290	290	290	240	240	240

193

Nickel-plated Y strainer

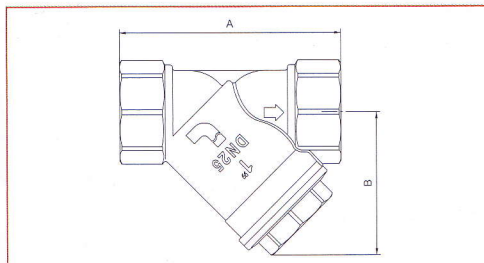

Suitable for domestic water services, heating and air-conditioning plants, compressed air systems.

Female/female threads and inspection plug.
Body in nickel-plated brass.

Minimum and maximum working temperatures:
-20°C, 110°C in absence of steam.


Available in 3 degrees of filtration: 500µm, 300µm, 50µm.

Threads: ISO228 (equivalent to DIN EN ISO 228 and BS EN ISO 228).

SIZE	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
A (mm)	55	55	58	70	87	96	106	126
B (mm)	40	40	40	48	56	64	73	89
DN	8	10	15	20	25	32	40	50
WORKING PRESSURE Kg/cm2 bar	20	20	20	20	20	20	20	20
WORKING PRESSURE psi	290	290	290	290	290	290	290	290

189

Self-cleaning strainer

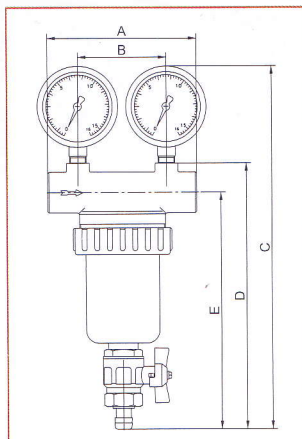

Suitable for domestic water services, heating and air-conditioning plants, compressed air systems.

SIZE	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
A (mm)	118	119	123	125	153	153
B (mm)	70	70	72	72	98	98
C (mm)	272	272	302	302	342	342
D (mm)	208	208	234	234	272	272
E (mm)	187	187	202	202	236	236
WORKING PRESSURE Kg/cm2 bar	16	16	16	16	16	16
WORKING PRESSURE psi	220	220	220	220	220	220

Supplied with an extractable straining cartridge, double pressure gauge and a hose cock to dump the impurities.
Minimum and maximum working temperatures:
-20°C, 110°C in absence of steam.

Degree of filtration: 100µm.

Threads: ISO228 (equivalent to DIN EN ISO 228 and BS EN ISO 228).



ART.
192-
193-
189



ART.
192-
193



ART.
192