


## SRM – SPRING RUBBER MOUNT

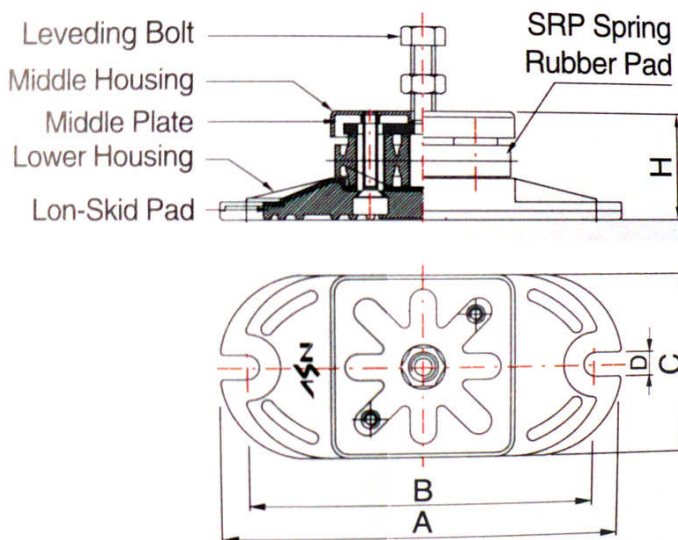

### Features

Using SRP type spring rubber pad with combined features of vibration proofing rubber and metal springs, this product is an improved mount product. SRM type permits level adjustment, thus capable of reducing horizontal deflection

### Usage

- Various equipment installed on strong bases
- Industrial Machine (Press, Shearing machine, Lathe, etc)
- Pump, Fan, AHU, Chiller
- Horizontal pipe & Riser pipe

### DIMENSION & SELECTION GUIDE BY LOADS

| TYPE     | Capacity (kg) | Deflection (mm) | Dimension (mm) |     |     |    |    |            |
|----------|---------------|-----------------|----------------|-----|-----|----|----|------------|
|          |               |                 | A              | B   | C   | D  | H  | Level Bolt |
| SRM-100  | 100           | 6               | 150            | 120 | 80  | 12 | 65 | M 10x60    |
| SRM-200  | 200           | 6               |                |     |     |    |    |            |
| SRM-400  | 400           | 6               | 230            | 200 | 104 | 12 | 70 | M 12x65    |
| SRM-600  | 600           | 6               |                |     |     |    |    |            |
| SRM-800  | 800           | 6               | 310            | 280 | 130 | 12 | 70 | M 12x65    |
| SRM-1000 | 1,000         | 6               |                |     |     |    |    |            |
| SRM-1200 | 1,200         | 6               |                |     |     |    |    |            |
| SRM-1500 | 1,500         | 6               |                |     |     |    |    |            |
| SRM-2000 | 2,000         | 6               |                |     |     |    |    |            |