




**L3 密閉式**  
Sealing 1/2"~2"



**L3P 密閉式**  
Sealing 1/2"~2"

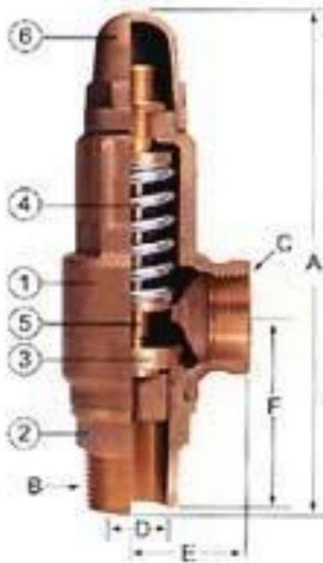

**L3-L 手拉式**  
Lever 1/2"~2"



● 尺寸表 Dimensions

(密閉式 Sealing)

單位 Unit:mm

(手拉式 Lever)

單位 Unit:mm

| 項目<br>Item<br>尺寸<br>Size | (密閉式 Sealing) |            |             |                            |    |     | (手拉式 Lever) |           |                          |     |                 |
|--------------------------|---------------|------------|-------------|----------------------------|----|-----|-------------|-----------|--------------------------|-----|-----------------|
|                          | A             | B<br>Inlet | C<br>Outlet | D<br>Valve seat<br>orifice | E  | F   | Lift        | Wt.<br>kg | 項目<br>Item<br>尺寸<br>Size | A1  | 重量<br>Wt.<br>kg |
| 1/2"                     | 139           | 1/2"       | 1/2"        | 13                         | 29 | 51  | 0.52        | 0.53      | 1/2"                     | 162 | 0.60            |
| 3/4"                     | 150           | 3/4"       | 3/4"        | 19                         | 36 | 56  | 0.76        | 0.68      | 3/4"                     | 174 | 0.76            |
| 1"                       | 182           | 1"         | 1"          | 25                         | 40 | 71  | 1.00        | 1.10      | 1"                       | 202 | 1.25            |
| 1-1/4"                   | 208           | 1-1/4"     | 1-1/4"      | 32                         | 51 | 83  | 1.28        | 1.87      | 1-1/4"                   | 222 | 1.86            |
| 1-1/2"                   | 233           | 1-1/2"     | 1-1/2"      | 38                         | 55 | 94  | 1.52        | 2.28      | 1-1/2"                   | 247 | 2.31            |
| 2"                       | 266           | 2"         | 2"          | 50                         | 67 | 103 | 2.00        | 3.91      | 2"                       | 287 | 4.13            |

● 材質表 General Material

| 序號<br>NO.             | 零件<br>Parts Name | 型式 Type | L3 密閉式<br>Sealing   | L3-L 手拉式<br>Lever   |
|-----------------------|------------------|---------|---|---------------------|
| 1                     | 閥體 Valve body    |         | Cast bronze 青(銅)銅   | Cast bronze 青(銅)銅   |
| 2                     | 閥座 Valve seat    |         | Forging brass(鍛造黃銅)   | Forging brass(鍛造黃銅) |
| 3                     | 閥盤 Disc          |         | Forging brass(鍛造黃銅)   | Forging brass(鍛造黃銅) |
| 4                     | 彈簧 Spring        |         | Steel(鋼)  | Steel(鋼)            |
| 5                     | 閥桿 Stem          |         | Brass(黃銅)   | Brass(黃銅)           |
| 6                     | 閥蓋 Cap           |         | Forging brass(鍛造黃銅)   | Cast bronze 青(銅)銅   |
| 使用壓力 Working pressure |                  |         | 0.3~10 kgf/cm <sup>2</sup>  |                     |
| 使用溫度 Working temp     |                  |         | -45℃ ~ 185℃   |                     |
| 使用液體 Working fluid    |                  |         | 非腐蝕性氣體、非腐蝕性液體、空氣、蒸氣<br>Noncorrosive Gas - Noncorrosive Liquid - Air - Steam |                     |

◆ 閥盤可加裝PTFE材質，型式：L3P、L3-LP。  
 ◆ 閥座材質亦可以青銅製造。  
 ◆ 閥盤可加裝EPDM材質，型式：L3E、L3-LE。

◆ The disc can be replaced with PTFE and those type L3P、L3-LP。  
 ◆ The valve seat can be also made of cast bronze。  
 ◆ The disc can be replaced with EPDM and those type L3E、L3-LE。